


UL 2464 Flexible Shielded PVC Jacketed Cables

UL 2464 柔性屏蔽 PVC 护套电缆

Engineered for Towline Use
拖链专用设计

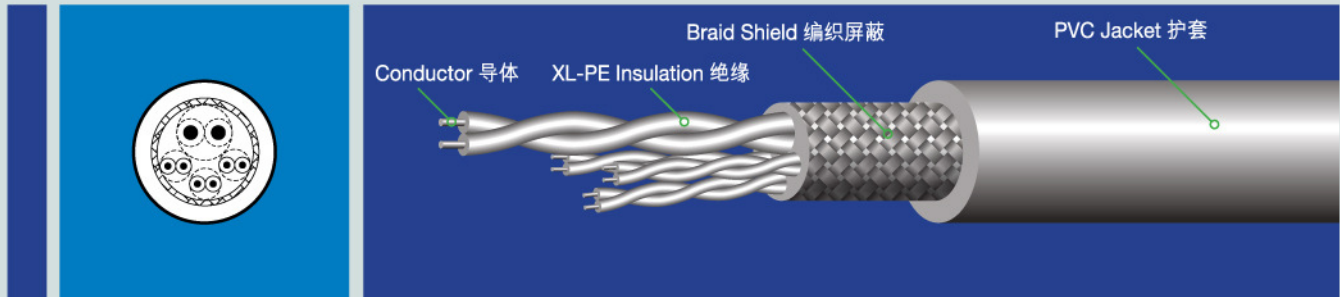

E148000 AWM STYLE 2464 80°C 300V VW-1- - - c AWM I/II A/B 80°C 300V FT1 PCXX

Part No. 型号	No. of Cores 芯数	Conductor 导体				Insulation 绝缘		Conductor Resistance 导体电阻 (Ω /km)
		AWG 线规	Construction 结构 (mm)	Area 截面 (mm ²)	Dia. 外径 (mm)	Thickness 厚度 (mm)	Dia. 外径 (mm)	
RMCS-SB001	1P	21	3/33/0.08	0.50	1.14	0.30	1.74	41.2
	3P	25	40/0.08	0.20	0.58	0.20	0.98	101.9
RMCS-SB002	1P	21	3/33/0.08	0.50	1.14	0.30	1.74	41.2
	4P	25	40/0.08	0.20	0.58	0.20	0.98	101.9
RMCS-SB003	1P	21	3/33/0.08	0.50	1.14	0.30	1.74	41.2
	5P	25	40/0.08	0.20	0.58	0.20	0.98	101.9
RMCS-SB004	1P	21	3/33/0.08	0.50	1.14	0.30	1.74	41.2
	6P	25	40/0.08	0.20	0.58	0.20	0.98	101.9
RMCS-SB005	1P	21	3/33/0.08	0.50	1.14	0.30	1.74	41.2
	7P	25	40/0.08	0.20	0.58	0.20	0.98	101.9

Product Description

- Rated Temperature: 80°C
- Rated Voltage: 300V
- Reference standard: UL 758, UL 1581 & CSA C22.2 No.210.2
- Stranded tinned copper conductor
- Lead-free cross-linked polyethylene (XL-PE) insulation
- Tinned copper wire braiding shield
- Lead-free oil resistant flexible PVC jacket
- Excellent bending resistance, L-R Bending test and U type Bending test: More than million times
- Passed UL VW-1 & CSA FT1 vertical flame test

Application

For portable control wiring in towline of machine tool equipment, as well as fixed internal wiring and external interconnection of electronic equipment.

产品说明

- 额定温度：80°C
- 额定电压：300V
- 参考标准：UL 758, UL 1581 及 CSA C22.2 No.210.2
- 镀锡绞合软铜线导体
- 无铅辐照交联聚乙烯绝缘
- 镀锡铜丝编织屏蔽
- 无铅，耐油，柔性聚氯乙烯护套
- 耐弯曲性能极佳，耐左右弯曲和 U 型弯曲百万次以上
- 通过 UL VW-1 及 CSA FT1 垂直耐燃试验

应用

用于拖链系统中作机床设备移动控制、以及电子设备内部及外部的固定连结。