


UL 2570 Multi-conductor Shielded PVC Jacketed Cables

UL 2570 多芯屏蔽 PVC 护套电缆

Engineered for Towline Use
拖链专用设计

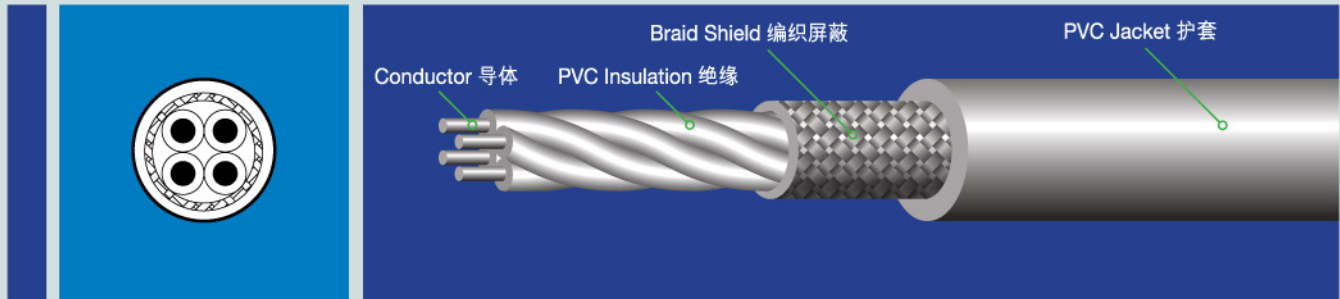

E148000 AWM STYLE 2570 No.AWG 80°C 600V VW-1 --- c AWM I/II A/B 80°C 600V FT1 PCXX

Part No. 型号	No. of Cores 芯数	Conductor 导体				Insulation 绝缘		Conductor Resistance 导体电阻 (Ω /km)
		AWG 线规	Construction 结构 (mm)	Area 截面 (mm ²)	Dia. 外径 (mm)	Thickness 厚度 (mm)	Dia. 外径 (mm)	
2570601-1	4C	16	82/0.15	1.45	1.56	0.79	3.15	13.6
2570604-2	4C	14	140/0.15	2.47	2.10	0.78	3.60	8.45
2570604-3	5C	14	140/0.15	2.47	2.10	0.78	3.60	8.45
2570604-4	6C	14	140/0.15	2.47	2.10	0.78	3.60	8.45
2570604-5	7C	14	140/0.15	2.47	2.10	0.78	3.60	8.45

Product Description

- Rated Temperature: 80°C
- Rated Voltage: 600V
- Reference standard: UL 758, UL 1581 & CSA C22.2 No.210.2
- Stranded bare copper conductor
- Lead-free flexible PVC insulation
- Tinned copper wire overall braid shield
- Lead-free oil resistant flexible PVC jacket
- Passed UL VW-1 & CSA FT1 vertical flame test

产品说明

- 额定温度：80°C
- 额定电压：600V
- 参考标准：UL 758, UL 1581 及 CSA C22.2 No.210.2
- 裸绞合软铜线导体
- 无铅柔性聚氯乙烯绝缘
- 镀锡铜丝总编织屏蔽
- 无铅，耐油，柔性聚氯乙烯护套
- 通过 UL VW-1 及 CSA FT1 垂直耐燃试验

Application

For portable control wiring in towline of machine tool equipment, as well as fixed internal wiring and external interconnection of electronic equipment.

应用

用于拖链系统中作机床设备移动控制、以及电子设备内部及外部的固定连接。