


Multi-pair Flexible Braid Shielded PU Jacketed Cables

多对柔性编织屏蔽PU护套电缆

Engineered for Towline Use
拖链专用设计

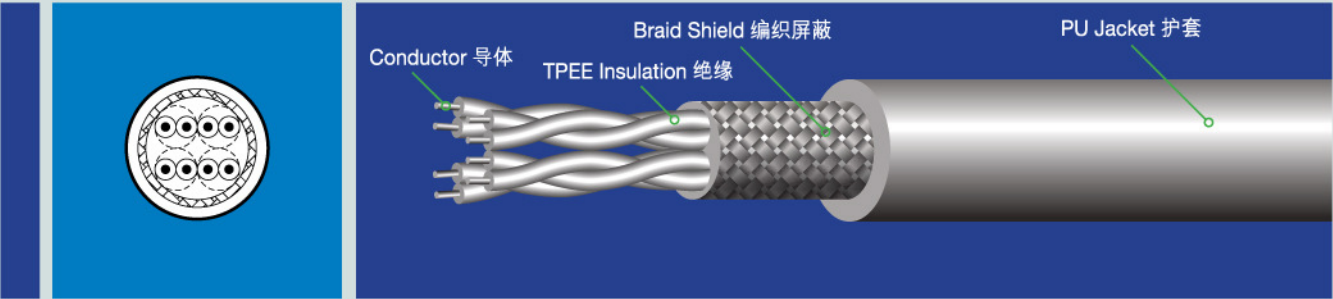

Part No. 型号	No. of Cores 芯数	Conductor 导体				Insulation 绝缘		Conductor Resistance 导体电阻 (Ω/km)
		AWG 线规	Construction 结构 (mm)	Area 截面 (mm²)	Dia. 外径 (mm)	Thickness 厚度 (mm)	Dia. 外径 (mm)	
TPEEPU-O-3313	4P	26	18/0.10	0.14	0.49	0.21	0.90	131.8
TPEEPU-O-3314	5P	26	18/0.10	0.14	0.49	0.21	0.90	131.8
TPEEPU-O-3315	6P	26	18/0.10	0.14	0.49	0.21	0.90	131.8
TPEEPU-O-3316	7P	26	18/0.10	0.14	0.49	0.21	0.90	131.8
TPEEPU-O-3317	8P	26	18/0.10	0.14	0.49	0.21	0.90	131.8

Product Description

- Rated Temperature: 80°C
- Rated Voltage: 300V
- Stranded bare copper conductor
- Lead-free TPEE insulation
- Tinned copper wire braiding shield
- Lead-free oil resistant, Flexible, PU jacket
- Excellent bending resistance
- Minimum bending radius=6xOD, 2,000,000 times

Application

For portable control wiring in towline of machine tool equipment, as well as fixed internal wiring and external interconnection of electronic equipment.

产品说明

- 额定温度：80°C
- 额定电压：300V
- 裸绞合软铜线导体
- 无铅聚脂弹性体绝缘
- 镀锡铜丝编织屏蔽
- 无铅，耐油，柔性，聚氨酯护套
- 耐弯曲性能极佳
- 最小弯曲半径为 6 倍的线材外径，2,000,000 次

应用

用于拖链系统中作机床设备移动控制、以及电子设备内部及外部的固定连结。