


“Halogen-free” Mini Hook-up Wires

「无卤」超细电子线

Mini hook-up wires are smaller versions of hook-up wires and are micro basic electric wire harnesses. They are most suitable for small electronic equipment and are easy to process. Low-smoke halogen-free mini hook-up wires can be designed to meet the requirements of environmental protection. Mini hook-up wires are used in all portable or smaller electronic products.

超细电子线是电子线中的迷你版本，是微型的基本电子连接线，最适合并容易加工在小型的电子设备中。亦可因应绿色环保需求，设计使用低烟、无卤素外被料的超细电子线。

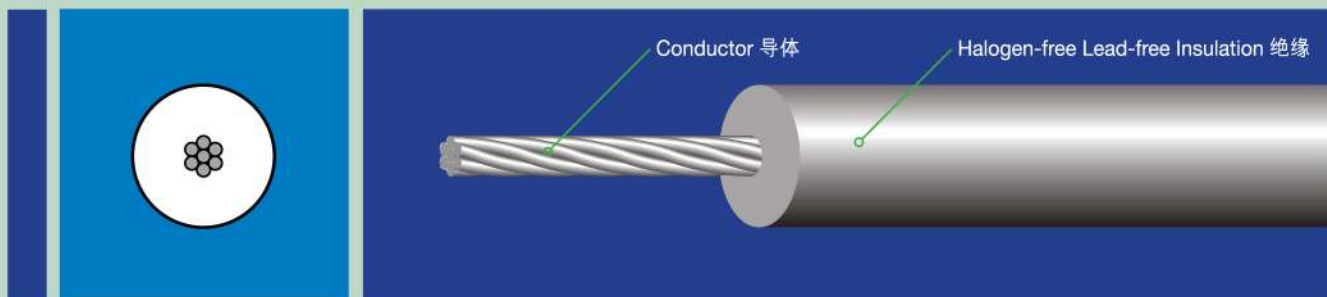

Part No. 型号	Type 类型	Rated Temperature 额定温度	Conductor 导体			Insulation 绝缘		Max. Conductor Resistance at 20°C 最大导体电阻
			AWG 线规	Construction 结构 (No./mm)	Nom. Dia. 标准外径 (mm)	Nom. Thick 标准厚度 (mm)	Nom. Dia. 标准外径 (mm)	Maximum Resistance 最大电阻值 (Ω/km)
114605	Regular 标准 (PVC)	80°C	34	7/0.06	0.18	0.10	0.37	1050
114603			32	7/0.08	0.24	0.09	0.42	514
114602			30	7/0.10	0.30	0.10	0.50	354
114600			28	7/0.127	0.38	0.10	0.58	223
900307	Halogen-free 无卤	105°C	32	7/0.08	0.24	0.15	0.54	596
900308			30	7/0.10	0.30	0.20	0.70	354
900309			28	7/0.127	0.38	0.20	0.78	223
900310			26	7/0.16	0.48	0.20	0.88	139

Product Description

- Rated voltage : 30V
- Reference standard : UL Subject 758, UL 1581 & CSA C22.2 No. 210.2
- Stranded tinned copper conductor
- Colour-coded halogen-free insulation
- Passes UL VW-1 & CSA FT1 vertical flame test

Application

For internal wiring of portable electronic appliance

产品说明

- 额定电压 : 30V
- 标准 : UL758, UL1581 及 CSA C22.2 No. 210.2
- 绞合镀锡铜丝导体
- 无卤绝缘
- 通过 UL VW-1 及 CSA FT-1 垂直燃烧测试

应用

用于手提电子设备内部连接