


Non-interference Cables with Individual Screened Pairs of Cores 防干扰各自屏蔽控制电缆

Engineered for Towline Use
拖链专用设计

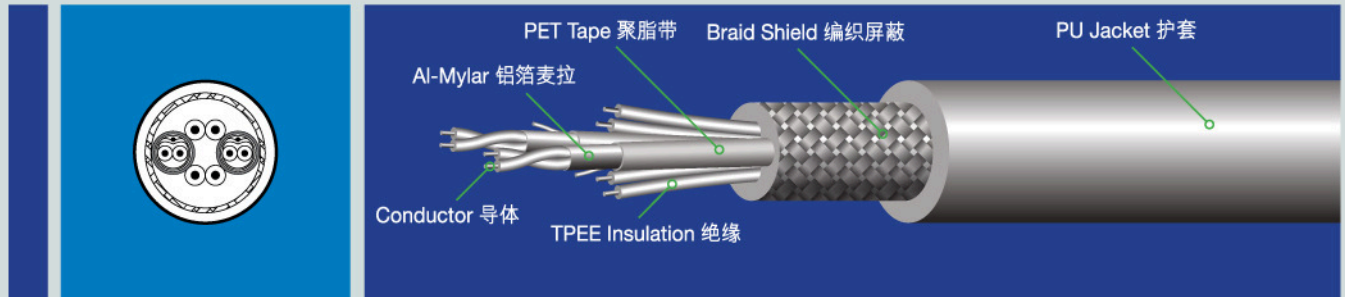

Part No. 型号	No. of Cores 芯数	Conductor 导体				Insulation 绝缘		Conductor Resistance 导体电阻 (Ω/km)
		AWG 线规	Construction 结构 (mm)	Area 截面 (mm²)	Dia. 外径 (mm)	Thickness 厚度 (mm)	Dia. 外径 (mm)	
TPEPUO-3335-1	4C	17	135/0.10	1.06	1.34	0.31	1.95	18.0
	2P	19	96/0.10	0.75	1.13	0.34	1.80	24.5
TPEPUO-3335-2	4C	17	135/0.10	1.06	1.34	0.31	1.95	18.0
	3P	19	96/0.10	0.75	1.13	0.34	1.80	24.5
TPEPUO-3335-3	4C	17	135/0.10	1.06	1.34	0.31	1.95	18.0
	4P	19	96/0.10	0.75	1.13	0.34	1.80	24.5
TPEPUO-3335-4	4C	17	135/0.10	1.06	1.34	0.31	1.95	18.0
	5P	19	96/0.10	0.75	1.13	0.34	1.80	24.5
TPEPUO-3335-5	4C	17	135/0.10	1.06	1.34	0.31	1.95	18.0
	6P	19	96/0.10	0.75	1.13	0.34	1.80	24.5

Product Description

- Rated Temperature: 80°C
- Rated Voltage: 300V
- Stranded bare copper conductor
- Lead-free TPEE insulation
- Stranded tinned copper conductor drain wire
- Tinned copper wire overall braid shield
- Lead-free oil resistant, Flexible, PU jacket
- Excellent bending resistance
- Minimum bending radius=6xOD, 2,000,000 times

Application

For portable control wiring in towline of machine tool equipment, as well as fixed internal wiring and external interconnection of electronic equipment.

产品说明

- 额定温度：80°C
- 额定电压：300V
- 裸绞合软铜线导体
- 无铅聚脂弹性体绝缘
- 绞合镀锡软铜导体地线
- 镀锡铜丝总编织屏蔽
- 无铅，耐油，柔性，聚氨酯护套
- 耐弯曲性能极佳
- 最小弯曲半径为 6 倍的线材外径，2,000,000 次

应用

用于拖链系统中作机床设备移动控制、以及电子设备内部及外部的固定连结。